

# Flush Plate 500



## Flush Plate 500 for InWall toilets

- Pneumatic actuation
- Mechanical actuation

### Product features

- Available in Pneumatic or Mechanical actuation
- Push button system
- Easy to install and service

### Available in 6 finishes

- Brushed Nickel, PVD
- Gunmetal
- Brushed Gold, PVD
- Black Matte
- White Matte
- Chrome

### Product details

MATERIALS	ABS plastic.
DIMENSIONS	236W x 152H x 8D mm.
INSTALLATION	Refer to installation instructions.



## Order codes

### Flush Plate 500 – Pneumatic actuation

192063	Flush Plate 500, Pneumatic, Brushed Nickel
192181	Flush Plate 500, Pneumatic, Gunmetal
192064	Flush Plate 500, Pneumatic, Brushed Gold
192276	Flush Plate 500, Pneumatic, White Matte
191803	Flush Plate 500, Pneumatic, Black Matte
191804	Flush Plate 500, Pneumatic, Chrome

### Flush Plate 500 – Mechanical actuation

192687	Flush Plate 500M, Mechanical, Brushed Nickel
192688	Flush Plate 500M, Mechanical, Gunmetal
192689	Flush Plate 500M, Mechanical, Brushed Gold
192690	Flush Plate 500M, Mechanical, White Matte
192686	Flush Plate 500M, Mechanical, Black Matte
192685	Flush Plate 500M, Mechanical, Chrome

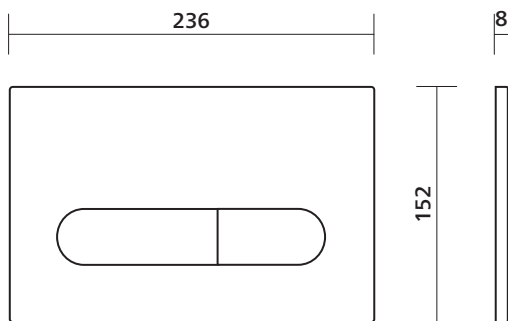

# SEIMA

kitchen + laundry + bathroom ware

seima.com.au

### Please note

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant. Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.

- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.
- Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.