

Collection: Elevate



Ceramic wall faced toilet suite Clean Flush, Nanoglaze, Easy Care Height

Features

- Stylish minimalist design, sits flat against wall
- Clean Flush rimless pan design for an efficient, powerful flush
- Compliant with AS1428.1 Ambulant guidelines
- White vitreous china with nanoglaze surface, easy to clean
- Soft-closing, easy-clean quick release seat with stainless steel pins
- Universal cistern, suits back entry or bottom entry plumbing

Order codes

191760	Modia WF, Deluxe seat	Old code: STO-305-05
191758	Modia WF, Slim seat	Old code: STO-305-03
191843	Modia WF, Flat seat	Old code: n/a
191756	Modia WF, Classic seat	Old code: STO-305-01

Product details

CISTERN Back entry or bottom entry plumbing (left or right inlet). ΡΔΝ Wall faced close coupled with rimless pan design. Universal trap, suitable for S or P trap installations. TRAPS SFAT Quick release seat with stainless steel hinges, soft closing. SETOUT Variable 90-180 using supplied connector; 150mm rec. This is a close coupled toilet suite - the cistern is fixed directly FIXING

to the pan and does not require wall fixing.

Pan may be bedded with cement base or using silicone sealant.

4 Star 4.5/3L flush. Reg No. L05839. WELS RATING

WELS Licence 0296. WM Licence 23345.



DELUXE SEAT

- 40 mm lid profile
- Premium quality
- Easy to clean, anti-scratch
- Rigid, ceramic-like surface - Made from Thermoset (UF)

SLIM SEAT

- 20 mm lid profile
- Premium quality
- Easy to clean, anti-scratch
- Rigid, ceramic-like surface Made from Thermoset (UF)


FLAT SEAT


Flat lid and seat


- Premium quality
- Easy to clean, anti-scratch
- Rigid, ceramic-like surface Made from Thermoset (UF)

Phermoplastic (PP) CLASSIC SEAT

- 40 mm lid profile - Lightweight, shiny finish
- Made from Thermoplastic (PP)

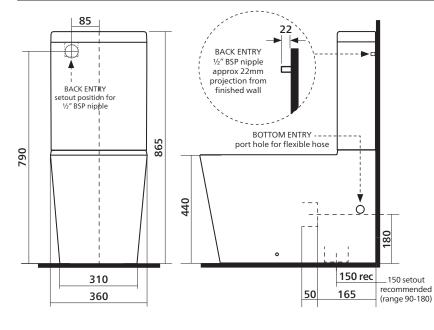









- Rimless Clean Flush pan for an efficient, powerful flush.
 - Easy care height making it easier to get on and off the seat.
 - Nanoglaze surface ultra-smooth, anti-bacterial, easy to clean.

Licence No. 0296

seima.com.au

kitchen + laundry + bathroom ware

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant. Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.
- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied
- Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes