

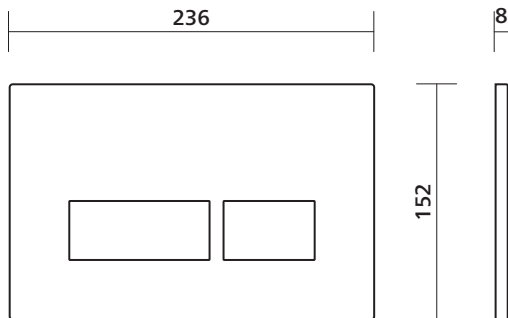




Flush Plate 800

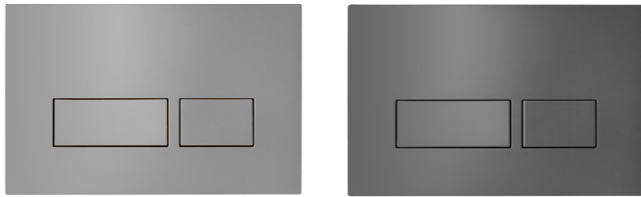

Flush Plate 800 for InWall toilets

- Pneumatic actuation
- Mechanical actuation

Product features

- Available in Pneumatic or Mechanical actuation
- Push button system
- Easy to install and service

Available in 6 finishes

- Brushed Nickel, PVD
- Gunmetal
- Brushed Gold, PVD
- Black Matte
- White Matte
- Chrome

Product details

MATERIALS	ABS plastic.
DIMENSIONS	236W x 152H x 8D mm.
INSTALLATION	Refer to installation instructions.

Order codes

Flush Plate 800, Pneumatic actuation

193197	Flush Plate 800M, Pneumatic, Brushed Nickel
193196	Flush Plate 800M, Pneumatic, Gunmetal
193195	Flush Plate 800M, Pneumatic, Brushed Gold
193194	Flush Plate 800M, Pneumatic, White Matte
193192	Flush Plate 800M, Pneumatic, Black Matte
193193	Flush Plate 800M, Pneumatic, Chrome

Flush Plate 800 – Mechanical actuation

193203	Flush Plate 800M, Mechanical, Brushed Nickel
193202	Flush Plate 800M, Mechanical, Gunmetal
193201	Flush Plate 800M, Mechanical, Brushed Gold
193200	Flush Plate 800M, Mechanical, White Matte
193198	Flush Plate 800M, Mechanical, Black Matte
193199	Flush Plate 800M, Mechanical, Chrome

SEIMA

kitchen + laundry + bathroom ware

seima.com.au

Please note

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant. Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.

- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.
- Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.