


Wall Spout



Anson Wall Spout

Please read these instructions in full before starting installation.

Important Safety Notes

Tapware must be installed by a licensed plumber in accordance with:


- Recommended working water supply pressure: 150–500 kPa
- Maximum hot water temperature – 75°C
- Australian standard AS3500.1 or relevant local authority requirements

Care of your Tapware

This guide applies to all finishes. Clean your tapware with mild soap and warm water. Wipe the surface dry with a clean soft cloth.


Important

Avoid cleaners that contain chemicals such as ammonia, and chlorine, including citrus based and cream cleaners. These types of cleaning products could adversely affect the finish of the tapware and should not be used.

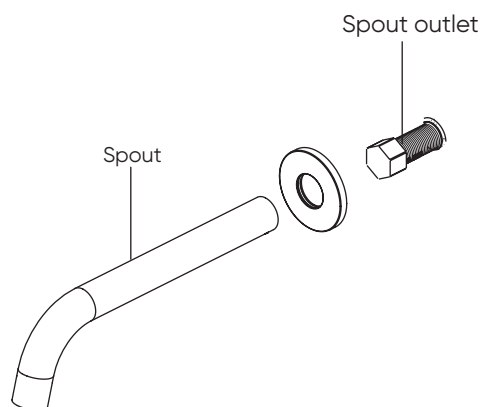


A

Create a 30mm hole for the outlet.

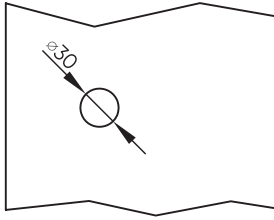

B

Remove screw cap from Spout outlet if applicable.



C

Wrap PTFE tape (thread seal tape) around the spout outlet.



D

Fasten the spout in place.

